



# Installation Guide: Linksys 2102 Phone Adapter w/Router

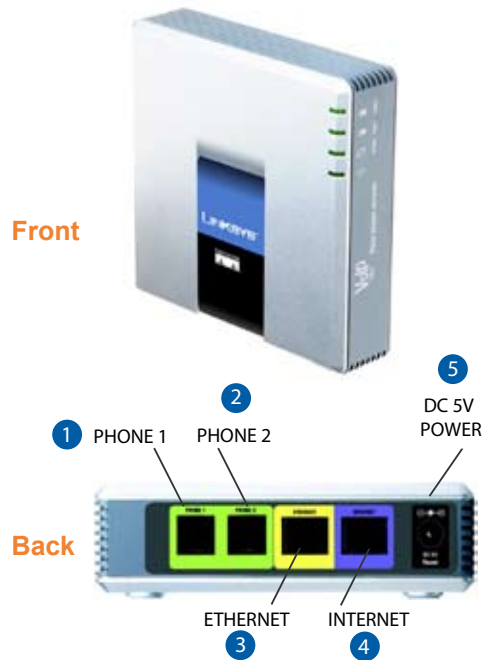

**Basic Installation Instructions**  
for connecting the ATA to the  
Internet Cable or DSL modem

**Your Start-up Kit should include:**  
Phone Adapter with Router  
5 V Power Adapter  
RJ-45 Ethernet Cable  
RJ-11 Phone Cable  
Power Adapter  
Quick Installation

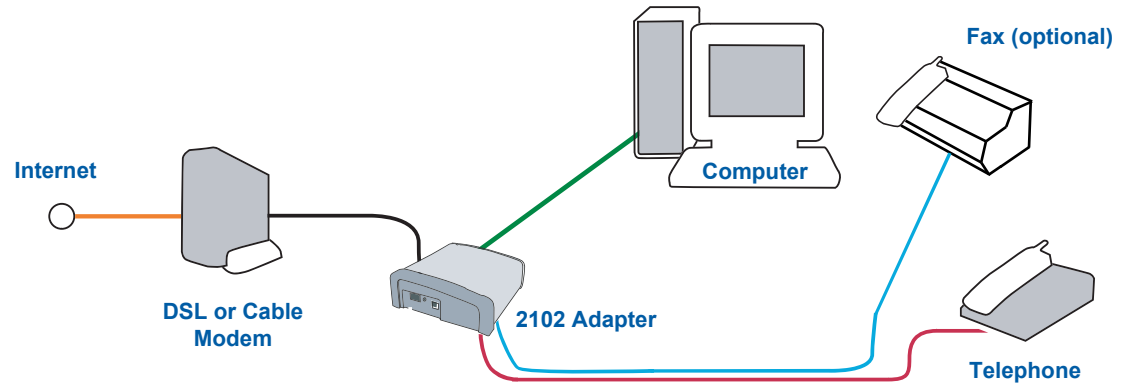

- Step 1** Power off your network devices, including your modem and PC. Connect one end of the RJ-11 phone cable to the Phone Adapter's PHONE 1 port. ① Connect the other end to your analog telephone or fax machine. (Repeat step with the PHONE 2 port). ②
- Step 2** Disconnect your PC from the modem. Using this Ethernet network cable, connect one end to the Ethernet port ③ of the Phone Adapter, and connect the other end to the Ethernet network port of your PC.
- Step 3** Connect one end of the included Ethernet network cable to the INTERNET port on the Phone Adapter. ④ Connect the other end to your broadband modem. Power on the cable/DSL modem.
- Step 4** Connect the included power adapter to the Power port ⑤ of the Phone Adapter, and then plug the power adapter into an electrical outlet. The power LED on the front panel will light up as soon as the Phone Adapter powers on. Power on your PC.
- Step 5** Place a test call by dialing any phone number. If you are able to complete your call, you have successfully installed your ATA device and service. If you get any other result, please visit our website for additional support.