


# Installation Guide: Linksys 2102 Phone Adapter w/Router (Set up with router already installed on premises)



**Basic Installation Instructions**  
for connecting the ATA to the Internet via a router connected to a Cable or DSL modem

**Your Start-up Kit should include:**  
Phone Adapter with Router  
5 V Power Adapter  
RJ-45 Ethernet Cable  
Quick Installation Guide

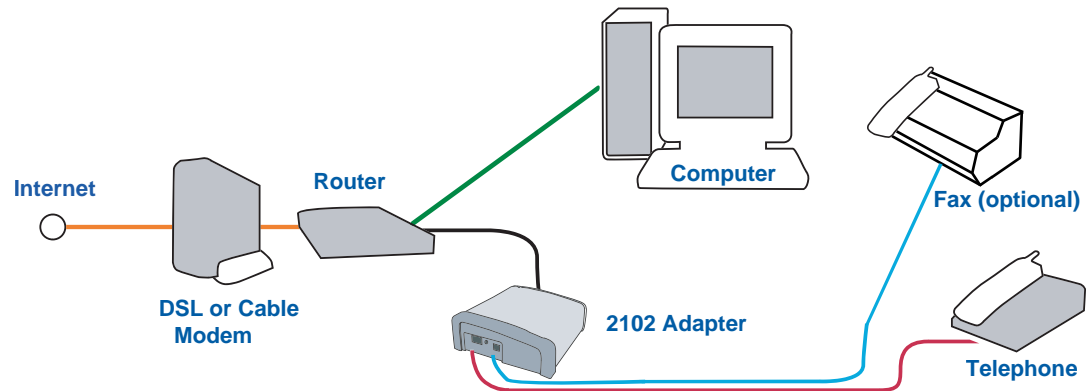

- Step 1** Connect one end of the included Ethernet cable into an available Ethernet port on your router or hub. Connect the other end of this cable into the Internet port of the ATA. ④
- Step 2** Connect one end of a phone cord (not included) into the PHONE port of the ATA. ①  
Connect the other end of this phone cord into the "Line" port on your telephone or fax machine.  
Note: Optional second line requires additional service plan. ②
- Step 3** Connect the included power adapter to the Power port ⑤ of the Phone Adapter, and then plug the power adapter into an electrical outlet. The power LED on the front panel will light up as soon as the Phone Adapter powers on. Power on your PC.
- Step 4** Place a test call by dialing any phone number. If you are able to complete your call, you have successfully installed your ATA device and service. If you get any other result, please visit our website for additional support.